

Fitting a timber floor over a subfloor

Harlow

① Timber Floor


Refer to Manufacturer for compatibility.

② PVA Adhesive

Apply as recommended by floor manufacturer.

③ ProVent 3mm Underlay

Incorporates moisture barrier, compatible with underfloor heating. 20db impact noise reduction.

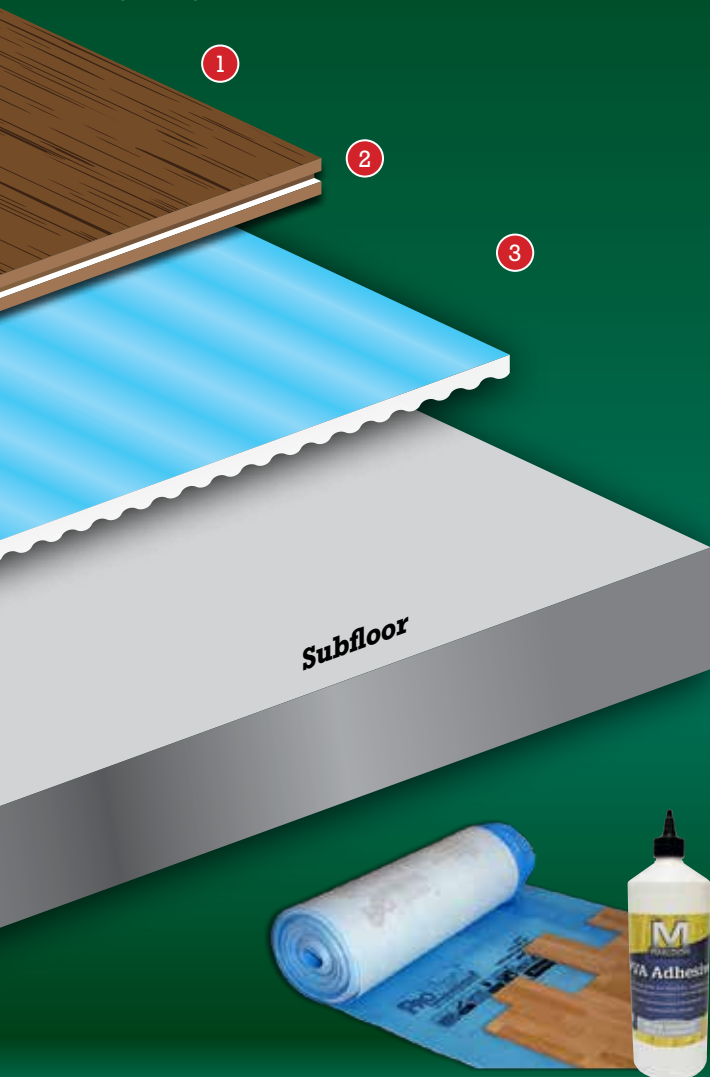

M

MARLDON®

Apply with confidence™

Burton-upon-Trent

Tel: 01258 512190

Coalville

Tel: 01530 832181

Derby

Tel: 01332 574222

Leicester

Tel: 01162 557966

Loughborough

Tel: 01509 842561

Nottingham

Tel: 01159 585311